

Model 3000 / Access 4000. GSM Modem Interface Cable. P/N: 994091

This cable is designed to connect a GSM Modem to a Port on a Model 3000 / Access 4000 UART Interface board.

Before the GSM Modem cable can be used, one of the following UART board options must be fitted to the Control Module:

993065 Single Port UART.


993066 Dual Port UART.

993068 Four Port UART.

If fitting the UART board follow the installation instructions carefully, ensuring that the Control Module is powered down and battery disconnected before the UART is fitted.

When programming a Comms Task (MENU, 7, 3, 1) for GSM Modem, the correct UART Port number (1 to 4) must be selected. The baud rate must then be set to 2400.

CONNECTION DIAGRAM

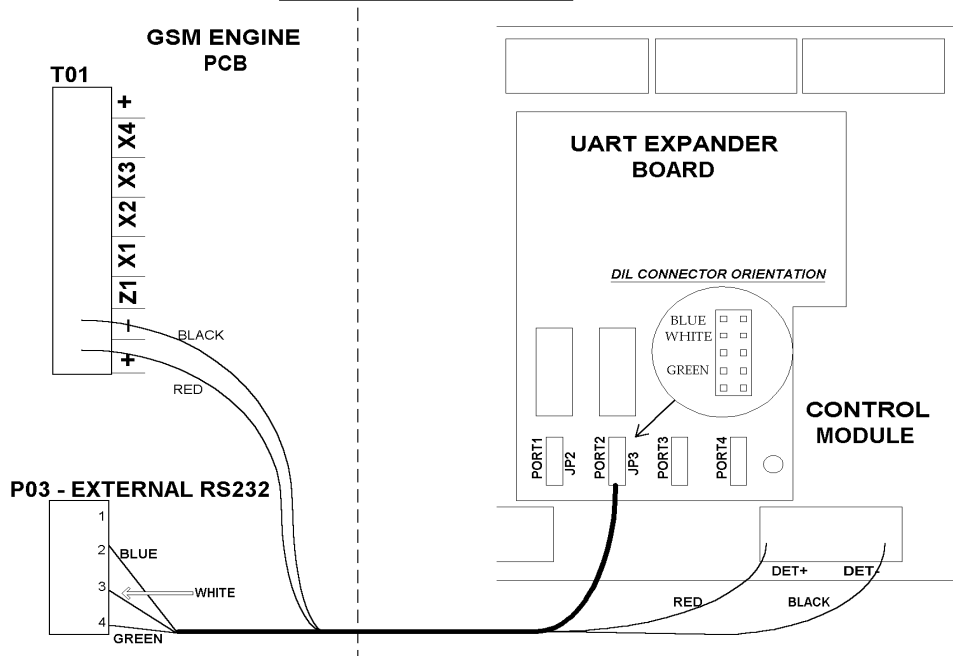

Model 3000 / Access 4000. GSM Modem Interface Cable. P/N: 994091

This cable is designed to connect a GSM Modem to a Port on a Model 3000 / Access 4000 UART Interface board.

Before the GSM Modem cable can be used, one of the following UART board options must be fitted to the Control Module:

993065 Single Port UART.

993066 Dual Port UART.

993068 Four Port UART.

If fitting the UART board follow the installation instructions carefully, ensuring that the Control Module is powered down and battery disconnected before the UART is fitted.

When programming a Comms Task (MENU, 7, 3, 1) for GSM Modem, the correct UART Port number (1 to 4) must be selected. The baud rate must then be set to 2400.

CONNECTION DIAGRAM

