

Integriti - Auto Arm by Named Action

Programming an Auto Arm solution on an Integriti System using a Named Action

Introduction:


For scenarios where an auto arm is required.

Example 1: An auto arm is triggered a 9pm each week night

Create a Time Period to trigger the auto arm.

Set the 'Start Time' to be 9:00:00PM and the 'End Time' to be 9:05:00PM. Select the days of the week. It is recommend that a minimum of 5 minutes is used between start and end times.

Save and close this window.

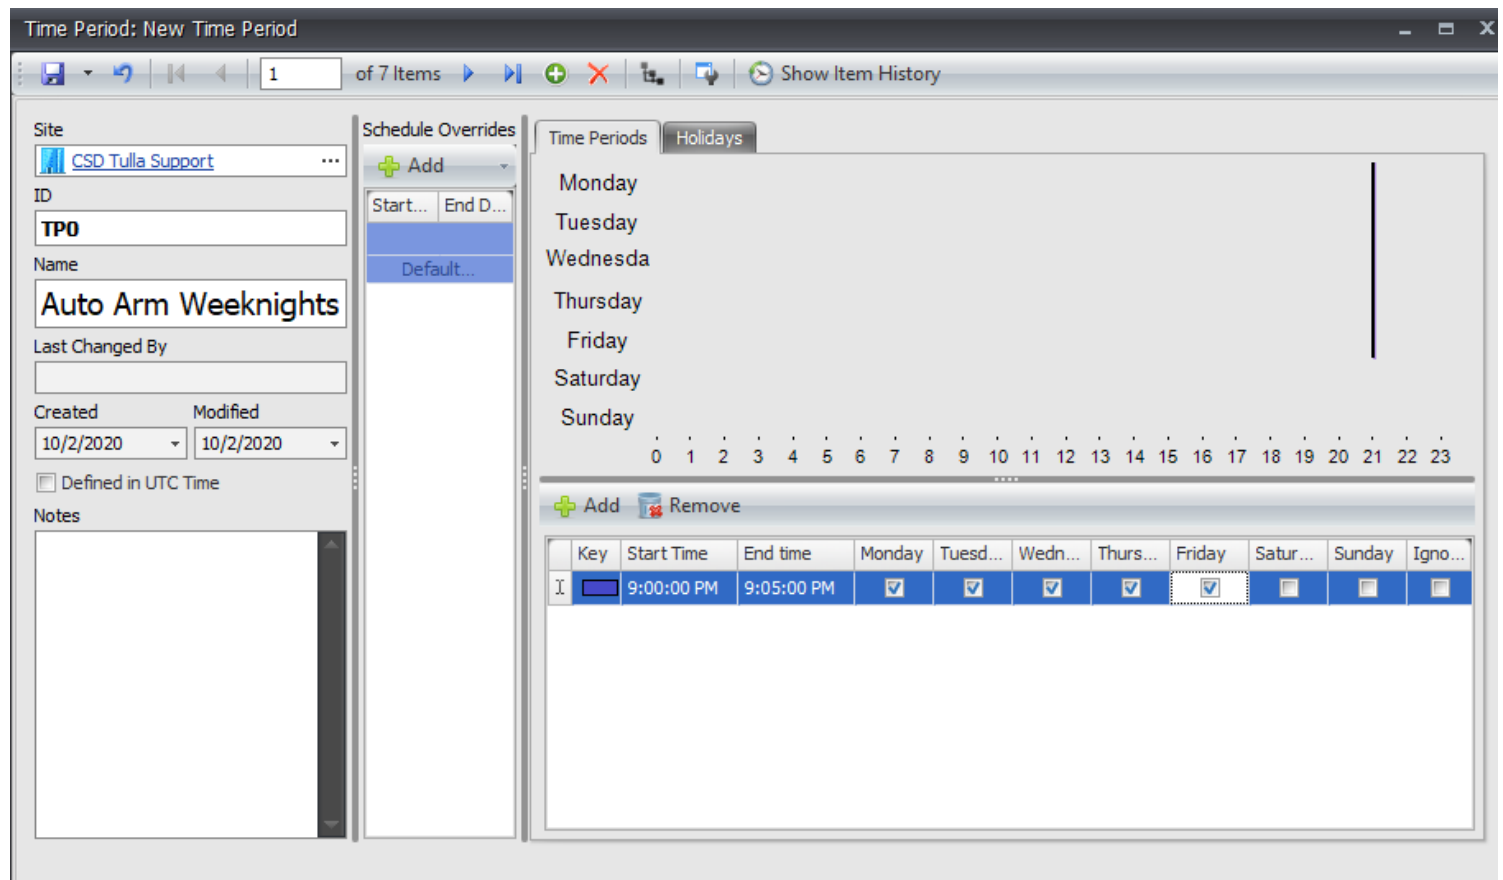

Time Period: New Time Period

1 of 7 Items

Site: CSD Tulla Support

ID: TPO

Name: Auto Arm Weeknights

Last Changed By:

Created: 10/2/2020 Modified: 10/2/2020

☐ Defined in UTC Time

Notes:

Schedule Overrides:

Time Periods: Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

Add Remove

Key	Start Time	End time	Monday	Tuesd...	Wedn...	Thurs...	Friday	Satur...	Sunday	Igno...
I	9:00:00 PM	9:05:00 PM	☒	☒	☒	☒	☒	☐	☐	☐

Create a 'Named Action' to complete the area control

Set the 'Action to Take' to 'Control Area' or 'Control Area List'

Set the 'Area' to be the area or area list to arm

Set 'When Asserted' to 'Arm'

Set 'When Disasserted' to 'Nothing'

Set the 'Optional Trigger' to the created time period.

Select Save.

<https://supportportal.csd.com.au/portal/en/kb/articles/integrati-auto-arm-by-named-action>